
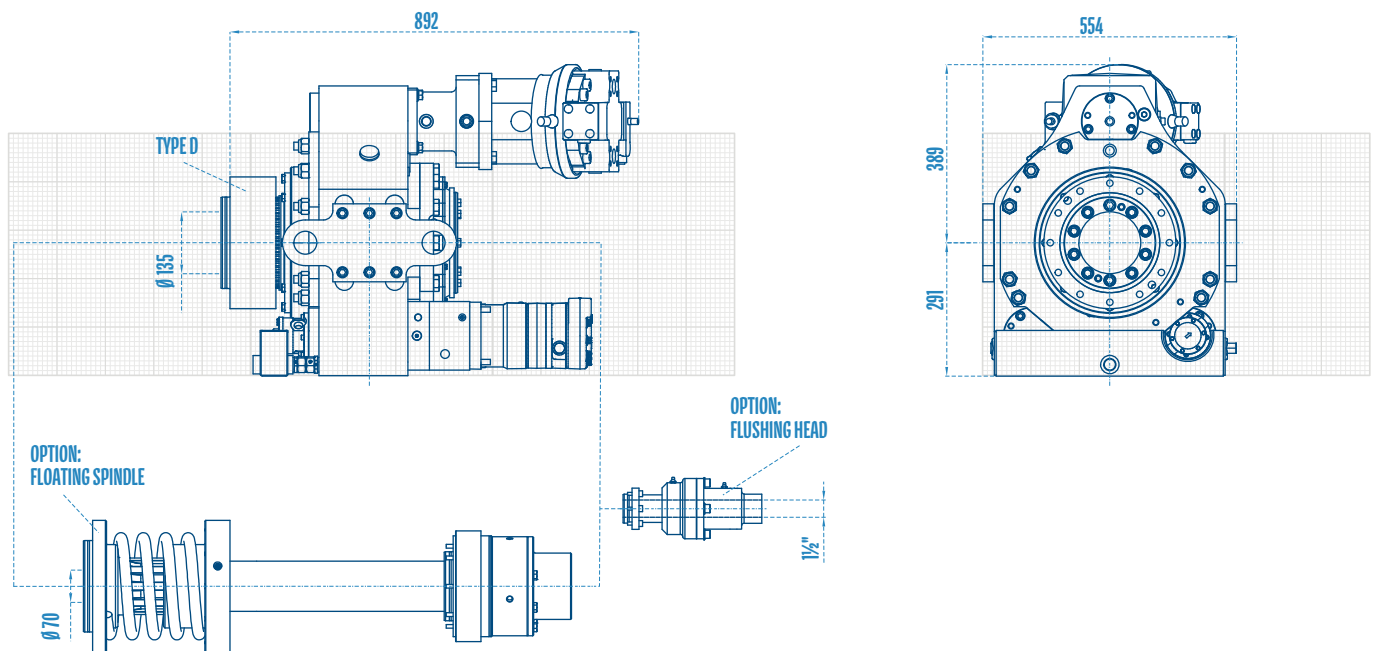


CH3200

Options Optionen

- > Hydraulic or electric shifting
Hydraulische oder elektrische
Schaltung
- > Mounting plates
Montageplatten
- > Flushing head 1 1/2"
Spülkopf 1 1/2"
- > Floating spindle
Floating Spindel
- > Speed sensor

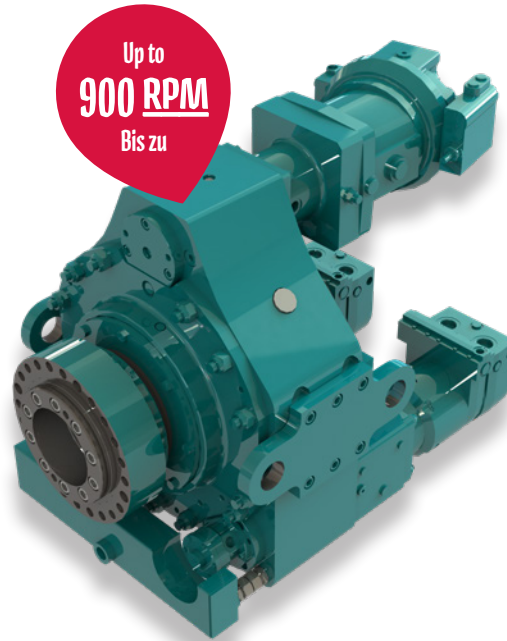

Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



850 kg **Weight** Gewicht

Rotary mechanism CH3200 Drehantrieb

Motor Type Motor Typ	Gear Gang	115 & HP34TS				115 & HP48TS				115 & HP67TS			
		1	2	3	4	1	2	3	4	1	2	3	4
Torque Drehmoment	kNm	14.3	9	2	0.8	19.1	12.2	2	0.8	26.2	16.9	2	0.8
Rotation Drehzahl	min⁻¹	53	84	370	900	40	62	370	900	29	45	370	900
p = 280 bar & Q = 170 l/min													
Motor Type Motor Typ	Gear Gang	160 & HP34TS				160 & HP48TS				160 & HP67TS			
		1	2	3	4	1	2	3	4	1	2	3	4
Torque Drehmoment	kNm	15.1	9.9	2.85	1.69	20	13.1	2.85	1.69	27	17.8	2.85	1.69
Rotation Drehzahl	min⁻¹	100	154	530	900	76	116	530	900	56	85	530	900
p = 280 bar & Q = 340 l/min													

Drive shafts Abtriebswellen

> Flange connection
Flanschverbindung

Other connections on request
Weitere Verbindungen auf Anfrage