


DHV32


Options Optionen

- > Hydraulic or electric shifting
Hydraulische oder elektrische Schaltung
- > Mounting plates
Montageplatten
- > Slide cylinder
Verschiebezylinder
- > Drilling accessories
Bohrzubehör



available
with
C-MOTORS

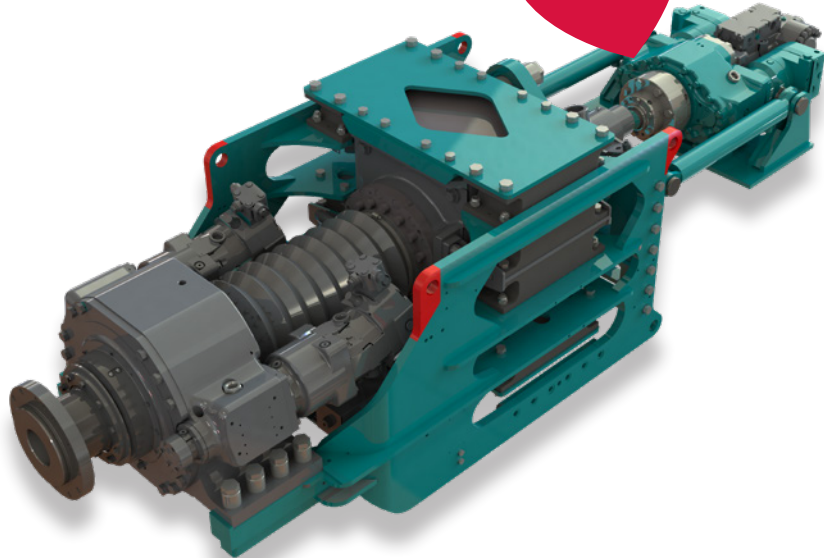

OPTION:
OVERBURDEN DRILLING



OPTION:
PERCUSSION KIT

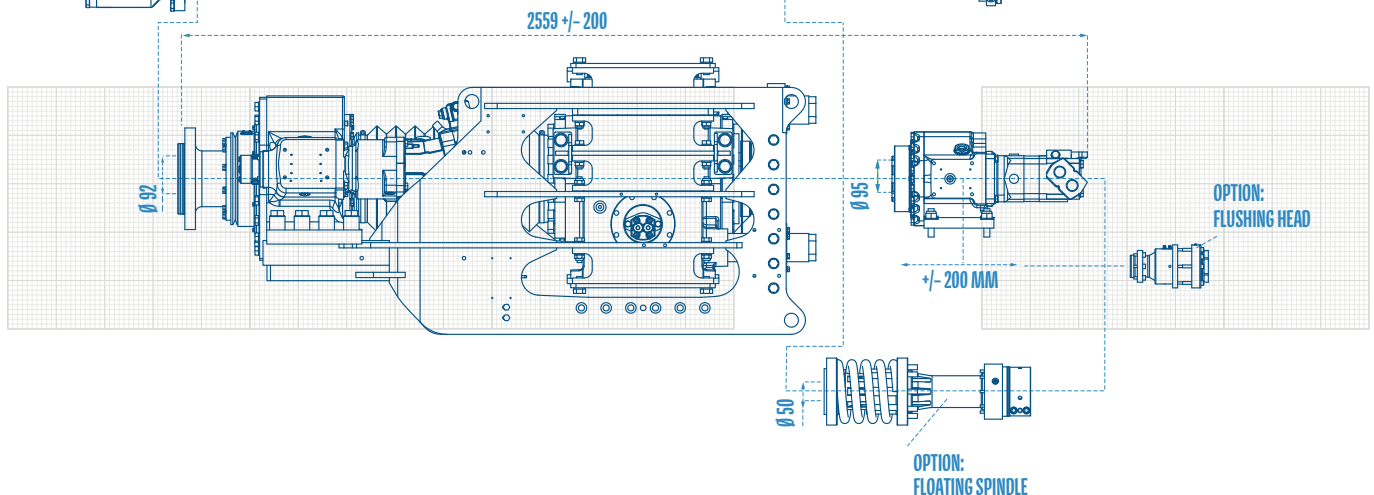


Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



1730 - 1830 kg **Weight** Gewicht · 160 kN **Traction** Zugkraft

DHV32 Gear box 1 / Casing Getriebe 1 / Rohr

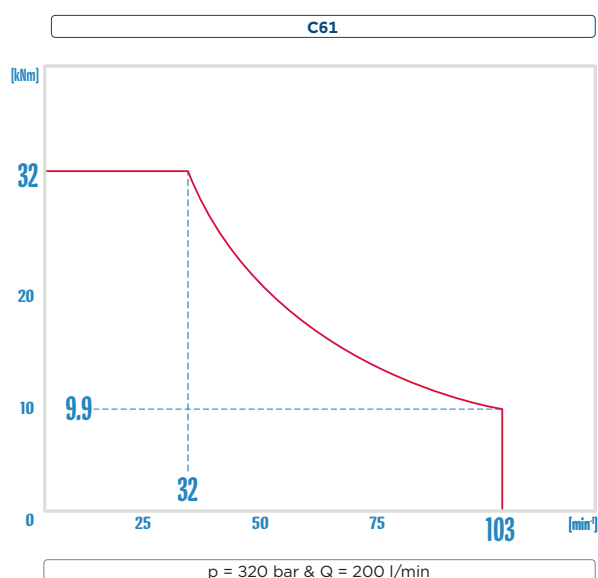

Vibrator Vibrator

Frequency

Frequenz

Hz

60

Centrifugal force

Fliehkraft

kN

160

p = 200 bar & Q = 120 l/min

RH12X Gear box 2 / Inner rod Getriebe 2 / Innengestänge

Motor Type Gear Gang	Motor Typ Gang	HP34TS				EG33TS			
		1	2	3	4	1	2	3	4
Torque Drehmoment	kNm	12	8	6	4	13	8.6	6.5	4.3
Rotation Drehzahl	min ⁻¹	62	95	124	190	48	73	96	146

p = 280 bar & Q = 170 l/min p = 320 bar & Q = 125 l/min

Option percussion unit Option Schlagwerk

Operating pressure Arbeitsdruck	Type Typ	4
Oil capacity Ölmenge	bar	160 - 200
Single blow energy Einzelschlagenergie	l/min	80 - 95
No. of blows Schlagfrequenz	Nm	... 550
	min ⁻¹	... 2800